



Instruction Manual

Human Detector *Flex* is a product of the

heddier electronic GmbH
Raiffeisenstraße 24
48734 Reken
Germany
Tel. +49 (0) 2864 95 178-0
info@human-detector.com

Release 05/2023



Specifications are subject to change without prior notice. All measurements have been made under specific conditions. Disclaimer: This document, as well as all other documents (offers / specifications / cover letters / etc.), do not guarantee any functionality of our products desired by the customer. **heddier electronic GmbH** does not guarantee any functionality or marketability desired by the customer. The customer should be able to make his own decision on the basis of the transmitted documents. **heddier electronic GmbH** supports him in this, as it is given by the "General Terms and Conditions of **heddier electronic GmbH**". In no case **heddier electronic GmbH** is liable for damages and consequential damages caused by the use of the products and descriptive documents. Excluded from this are damages caused by negligent behavior or damages that are regulated by superior laws.

Copyright by **heddier electronic GmbH**. **Human Detector** is a registered trademark of **heddier electronic GmbH**.

Table of contents HDF-WIRE

Introduction	3
Safety Instructions	5
Human Detector Flex Sensors	6
HDF-WIRE	7
Use and Operation Principle	7
Design and Connections	8
Mounting Location and Installation	9
Monitoring of Filling and Water Levels	14
System Login	15
Maintenance and Care	18
Human Detector Flex Software	20
Terms of Warranty	20
Procedure in Case of Warranty Repair	20
Miscellaneous	20
Help & Support	21

Introduction

Security and surveillance technology for museums, exhibitions, private collections and luxury goods trade

Thank you for choosing the **Human Detector Flex** alarm system.

A powerful, compact and quick-to-install security and surveillance system, it supports you in protecting your exhibits and valuables. Whether paintings, sculptures or automobiles, the **Human Detector Flex** system features a wide range of applications.

Sensors and alarm modules are available for almost every task. These are extremely small and can be operated with inexpensive lithium batteries, which last for up to 10 years.

(HDF - **Human Detector Flex**)

HDF-3D PROTECT	The HDF-3D PROTECT module detects the slightest vibrations (structure-borne sound) and movements. This provides for the effective protection of showcases, pedestals, technical exhibits and vehicles.
HDF-TOUCH	Approaching and touching objects can be easily detected with the HDF-TOUCH module. The system is ideal for securing metallic objects, but can also be used for other purposes.
HDF-HANG	HDF-HANG secures pictures and hanging objects on gallery rails.
HDF-OPTICAL	Pictures, paintings and other hanging objects can be secured sustainably, simply and contact-free with HDF-OPTICAL .
HDF-EXTERN	External sensors with an alarm output (NO or NC) can be connected directly to the HDF-EXTERN module. This allows the Human Detector Flex System to be extended as required.
HDF-WIRE	Securing with tear-off wires is in many cases the cheapest and quickest way to secure "small items" against theft. The HDF-WIRE module supports up to two signalling circuits.
HDF-DOOR	HDF-DOOR secures doors, flaps and inspection hatches.
HDF-SHOCK	The HDF-SHOCK module detects heavy blows, position changes and vibrations.
HDF-REMOTE	The HDF-REMOTE panic button allows for alarm messages to be easily and invisibly sent by supervisors.

All alarm modules, with the exception of the **HDF-REMOTE** panic button, can additionally be operated with an external power supply unit. The connection to the alarm centres (**HDF-BUZZER** and **HDF-SPEECH**) and the **HDF-AMD** alarm management system is wireless via radio. The communication that takes place in the 868 MHz range uses a special modulation method that easily penetrates solid walls and large buildings. The ranges achieved here are often several times greater than those that can be achieved with conventional systems.



The HDF-BUZZER and HDF-SPEECH alarm centres

Two systems with different extension levels are available with the **HDF-BUZZER** and **HDF-SPEECH** alarm centres.

The basic system **HDF-BUZZER** enables the output of a loud alarm via a built-in piezo siren (buzzer). In addition, three potential-free relay outputs are available. These can be individually controlled by the alarm modules. Alarm messages are acknowledged, and the system is armed and disarmed via an external input using a key switch.

The **HDF-SPEECH** alarm centre also has a voice output. Voice and sound messages are stored as .mps3 files and used as alarm messages.

The **HDF-AMD** unit (**AMD = Alarm Management Device**) enables targeted forwarding of alarm messages to IP-based control centers according to **SIA-DC09** standard and Ademco CID encoding. A precise distinction is made here as to who is responsible for which alarm. Likewise, the **HDF-AMD** in combination with the **HDF-ANTIJAM** monitors the radio network for interfering signals. The **HDF-AMD** is an open system. Future projects - such as the transmission of measurement data (temperature, humidity, etc.), but also the connection to video control centres - can be implemented.

Safety Instructions

The **Human Detector Flex** systems are designed and manufactured according to the latest quality and safety standards. The following installation and usage instructions must be adhered to:

1. Get information about safety instructions

Read the entire instruction manual before operating the devices. Keep the instruction manual in a safe place. Observe all safety instructions and notes in this instruction manual.

2. Penetration of objects or liquids

Avoid inserting or penetrating objects or liquids into the housings of the **Human Detector Flex** systems. Should this nevertheless occur, immediately disconnect the unit from the power supply (mains adapter or batteries) and send the unit to an authorised dealer or to the manufacturer for inspection.

3. High temperatures

Keep the systems away from fire, heaters or other heat-producing devices. Never install the **Human Detector Flex** sensors and devices in or on highly flammable objects such as fuel tanks.

4. Climate

The units have been designed for use at temperatures between -10°C to +50°C. Operating the devices outside this temperature range must be avoided and cause permanent damage.

5. Cleaning

Do not use aggressive detergents or apply excessive moisture when cleaning the **Human Detector Flex** sensors. Follow the recommendations for the individual products.

6. Power supply

Do not connect the **Human Detector Flex** units directly to a 230 volt mains supply. Only use a suitable power supply (as included in the scope of delivery) or battery (type CR2450 or equivalent).

Important safety note!

The installation, programming and set-up must be carried out by trained and qualified personnel. Subsequent changes during normal operation (such as the relocation of **Human Detector Flex** modules) can be carried out by trained staff (not qualified personnel). However, the above-mentioned safety instructions and general rules of electrical engineering must be observed. If unsure, ask your dealer or a qualified electrician.

heddier electronic GmbH does not guarantee or assume any responsibility for installations carried out by third parties. This also applies if personnel was trained or in contact beforehand.

Human Detector Flex Sensors

The **Human Detector Flex** System includes a range of sensors. All sensors have an extremely compact design, low energy consumption and a high radio range. The sensor housings provide good mechanical protection and are made of shatter-proof ABS plastic with a UL94V-1 fire rating.

The following chapters describe the functions of the different types of sensors. Take the time to read the information carefully. The right choice of sensor and the correct installation are important for the faultless operation.

Note:

Please contact us, if you cannot find a suitable type of sensor for your application. We will then try to develop a possible selection or operational environment for you. We are able to adapt sensors to your needs or develop new types of sensors in special cases. **Human Detector Flex** is an open system and grows with the requirements of the users.

**heddierr electronic GmbH offers upon request:
Training and coaching for interested customers.
Contact our sales department.**



HDF-WIRE

Use and Operation Principle

The **Human Detector *Flex*** alarm sensor **HDF-WIRE** was developed for the use in museums and exhibitions. The protection concept used by this sensor is one of the classical methods and has been used successfully for decades for the protection of objects. The modern **HDF-WIRE** sensor turns it into a modern and powerful security system, due to its microprocessor technology.

The so-called tear-off wires are used to protect freestanding objects. To do this, the wire is fed through openings in the object that are not visible or difficult to see. The tear-off wire should be designed to break at a tensile load of less than 1 kg. In that case, an alarm is triggered. This ensures that the item is not snatched out of the hand of a potential thief during removal and causing damage. One wire can protect several items at the same time. The **HDF-WIRE** sensor module is capable of monitoring two separate wire loops. These are evaluated separately and independently of each other. Each wire loop can be up to 100 m in length.

Note!

The **HDF-WIRE** sensor is also capable of monitoring water levels. An alarm is triggered, if a liquid touches the two sensors. The same applies when the level drops and comes clear of the sensors again.



The **HDF-WIRE** sensor - like other sensors from the **Human Detector *Flex*** range - is attached by two screw fittings.

For objects grouped together in larger numbers and which are difficult to protect individually, we recommend using the **HDF-WIRE** sensor. This security system is not intended for valuable exhibits. Once an alarm is triggered, the wire loop must be closed again manually. There is no automatic reactivation as it is the case with other sensors.


The **HDF-WIRE** sensor is suitable for the following protection tasks:

- **Protection of vases and trophies on cabinets and pantries**
- **Protection of chairs and small furniture**
- **Protection of objects on tables**
- **... and more**

- **Special application: Monitoring of filling and water levels**

Design and Connections

The electronics of the **Human Detector Flex** alarm module **HDF-WIRE** are located on a printed circuit board inside the sensor housing. Open the housing cover by removing the four locking screws. **Do not remove the four screws that connect the circuit board to the base plate of the housing.** There are no connecting elements or controls below the circuit board that are necessary for operating the sensor electronics. If you have opened the housing, please handle the sensor electronics with extreme care. Use tweezers to move the jumpers (micro connectors).

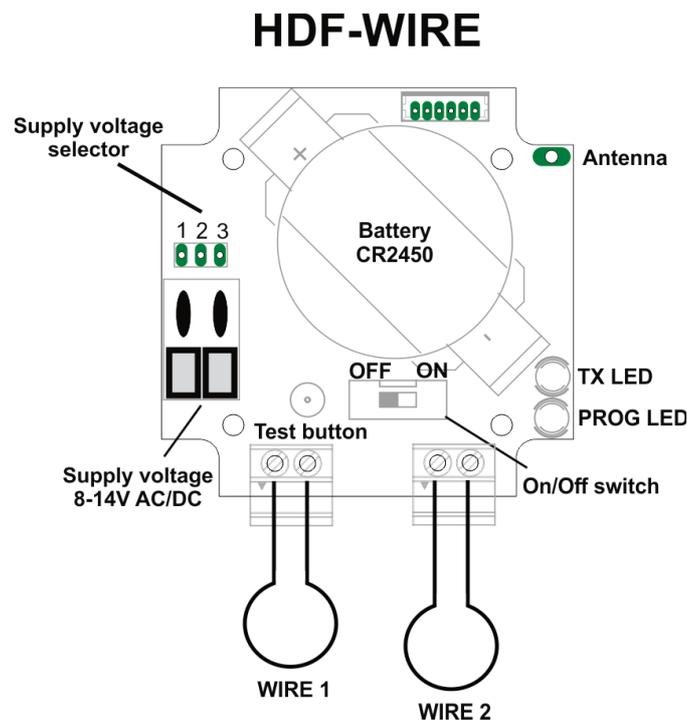

Terminal Operating Voltage	<p>Operating voltage 8-14 V, AC or DC, current 100 mA min.</p> <p>The connection has internal reverse polarity protection. Only use rigid connection cables or flexible cables with wire end ferrules and a cross-section of 0.25 ... 0.34 mm². The use of cables with larger cross-sections may cause damage to the terminal.</p>
Selecting the Operating Voltage	<p>Pin 1 and pin 2 connected -> external operating voltage Pin 2 and pin 3 connected -> battery operation with CR2450 (standard setting)</p> <p>Ensure that the micro connector is properly plugged in. It may come loose otherwise during operation and deactivate the sensor module.</p>
Antenna	1/4 lambda wire aerial for 868 MHz
Wire 1	<p>Terminals for tear-off wire (loop 1)</p> <p>The maximum wire length is 100 m.</p>
Wire 2	<p>Terminals for tear-off wire (loop 2)</p> <p>The maximum wire length is 100 m.</p>
Test button	Button for test transmissions
On/Off switch	<p>Slide switch for switching on and off</p> <p>Use a pointed object (e.g. a biro) to operate the switch.</p>
TRANSMITTING LED	Flashing red once -> transmission mode
PROG LED	Flashing green -> once per minute: message "Battery end of life imminent" Version number at start-up
CR2450 battery	Lithium button cell 3.0 V type CR2450

Mounting Location and Installation

The power and flexibility of the **Human Detector Flex** alarm system, amongst others, lies in its wireless radio connection. Due to the transmission frequency and protocol, a high level of security is ensured. The modulation process contributes to an increased range compared to products from various competitors. To ensure unrestricted wireless radio operation, a few basic rules should be observed:

- Do not mount the sensor module directly on metal surfaces or parts.
- If this is not possible, a minimum distance of approx. 40 cm should be kept from the metal surface. This is important to ensure proper radiation of the transmitting antenna.
- Choose an installation position of the sensor module so that there are no large metal parts between the module and the radio control unit. This is critical, for example, when the sensor modules are placed in display cases or vehicles.
- Choose an installation location so that you have access to the sensor module at all times. This is necessary, for example, for checks and changing the batteries.
- **Under no circumstances may unauthorised persons have free access to the sensor modules.** An exception can be sensor modules that inevitably trigger an alarm in the event of contact (such as **HDF-OPTICAL**, **HDF-TOUCH** and **HDF-3D PROTECT**). Access by unauthorised persons, however, should only be possible in exceptional circumstances.

Note:

The distance of 40 cm to metallic surfaces and parts can be reduced, if it is not possible to maintain this distance. In this case, however, you should check the stability of the radio link very carefully.

Choosing the location for installation

Choosing the location for installation is variable within the framework of the specifications described above. However, it is recommended to install the **HDF-WIRE** alarm module close to the protected exhibits. If remote operation is desired, the cable to the protected exhibits should be made of sufficiently robust two-core cable. A two-pole terminal should be provided at the end of the cable to connect the tear-off cable.



Attach the tear-off wires to the objects so that they cannot be removed. Thread the tear-off wires through openings and eyelets or secure flaps by fixing them with a tear-off wire.

Note:

In some cases, it is required that objects are secured with visible and tensile wires. In this case, the **HDF-WIRE** sensors provide protection against cutting of the safety wires.

Please note that securing with tear-off wires is not always a sufficient option for high-value exhibits. We recommend the additional use of other **Human Detector Flex** Alarm sensors. If a tear-off wire has triggered an alarm, it usually needs to be replaced or refitted. The multiple usage is not possible without appropriate work.

Selecting the Operating Voltage

The **Human Detector Flex** alarm sensors have the option of being operated by battery or external power supply (see "Design and Connections").


Battery Operation

Your sensor module is supplied with a CR2450 lithium button cell *1. Please insert these into the sensor module as follows:

- Check that the on/off switch is in the "Off" position. Otherwise, change the setting accordingly.
- Remove the four outer screws and remove the cover from the sensor housing.
- Insert the included **CR2450** battery into the holder. The positive terminal should point up. Apply slight pressure to lock the battery into the holder. Check the proper engagement of the battery.
- Check whether pin 2 and pin 3 are connected to the micro connector in the "Operating voltage selection" field.
- Close the sensor housing by inserting and tightening the four housing cover screws. Proceed carefully and do not overtighten the screws.
- Switch on the sensor module. First, an alarm is automatically generated during start-up. The red TRANSMITTING LED flashes once, the green PROG LED indicates the version status (e.g. `_short_` `_long_` for version A).

Note:

Be careful not to damage the electronics on the circuit board when inserting the battery.

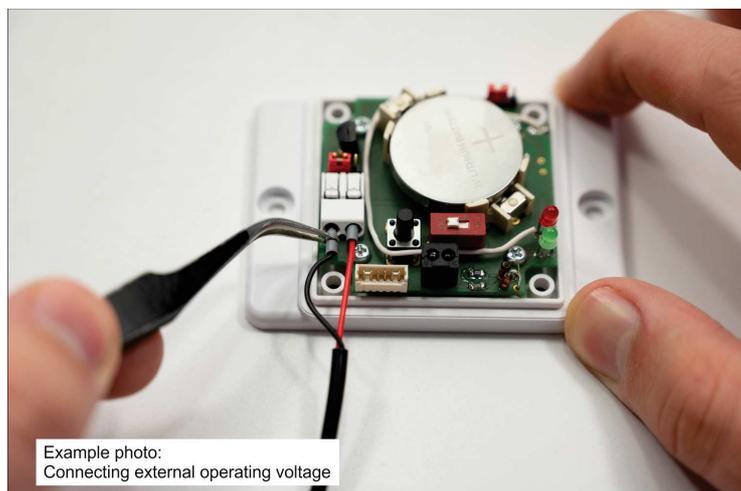

Operation with External Power Supply Unit

In general, any power supply unit with an operating voltage of 8-14 V AC or DC can be used. The installer is responsible to ensure compliance with the legal requirements relating to the power supply unit. These can vary depending on country and region. The alarm modules contain an internal rectifier that is capable of operating with AC voltages. The current of the power supply unit should be at least 100 mA. Ensure that the current is stable without the operating voltage dropping.

Note:

heddi er electronic GmbH supplies a suitable power supply unit with an output voltage of 12 V DC and a max. current of 2000 mA (item: **NT-12-2A**).

To start up the alarm module with an external power supply unit, proceed as follows:

- Check that the on/off switch on the alarm module is in the "Off" position. Otherwise, change the setting accordingly.
- Remove the four outer screws and remove the cover from the sensor housing.
- Connect the two connection cables of the power supply unit to the operating voltage connection terminal on the upper side of the sensor circuit board. Polarity is of no importance here (see above).

Important note:

Use tweezers or a small pair of pliers to insert the cable ends into the terminals. **Only use a rigid cable with a cross-section of 0.25 - 0.34 mm². It is also possible to use a flexible cable with appropriately sized ferrules.** Cables with a larger cross-section than 0.34 mm² can cause permanent damage to the terminals.

The image shown may differ from the sensor module you are using. This does not affect the basic procedure.


- Check in the "Operating voltage selection" plug-in field whether pin1 and pin2 are connected to the micro connector.
- There is a recess in the housing cover through which you can lead the external voltage cable to the outside.
- Close the sensor housing by inserting and tightening the four housing cover screws. Proceed carefully and do not overtighten the screws. Make sure that the external power cable is properly inserted and routed out.
- Put the external power supply unit into operation.
- Switch on the sensor module. First, an alarm is automatically generated during start-up. The red TRANSMITTING LED flashes once, the green PROG LED indicates the version status (e.g. short long for version A).

Note:

Be careful not to damage the electronics on the circuit board when connecting the external power supply.

Press the corresponding retaining button on the terminal and carefully pull out the cable to remove an external voltage cable. Use a suitable tool and proceed with care (see photo above).


***1: The CR2450 lithium batteries may not be supplied when shipping larger quantities of alarm sensors by air freight.**

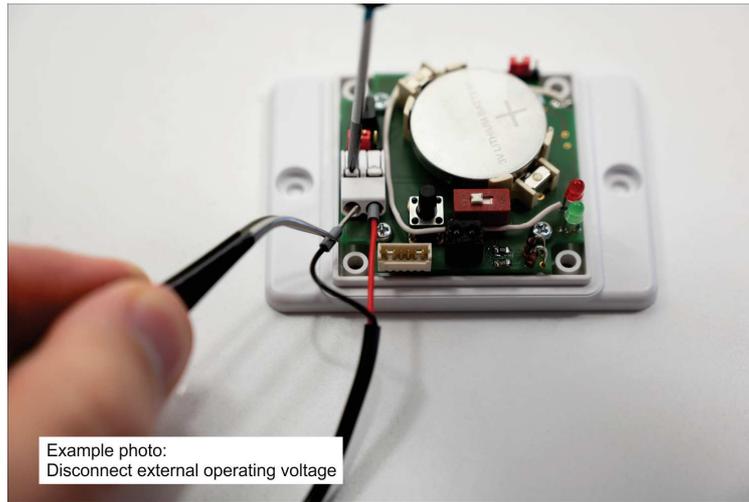

Increasing the range by externally placing the antenna on the sensor module

The **Human Detector Flex** alarm sensors have a built-in $\frac{1}{4}$ lambda wire aerial. This has been adapted in length for the transmission frequency of 868 MHz. The antenna is delivered in the plastic housing of the sensor module. In order to fit into the housing, the antenna is bent and placed between the components on the top of the circuit board. Ensure that the antenna is exposed and not trapped by the housing cover. The function of the on/off switch and the test button must not be restricted by the antenna.

Shadowing may occur in the radio propagation, as there are components, such as the lithium button cell, in the direct vicinity of the antenna. If you find that the range of the sensor module is not sufficient, you should move the antenna to the outside (external). **The use of a properly aligned external antenna increases the range considerably.**

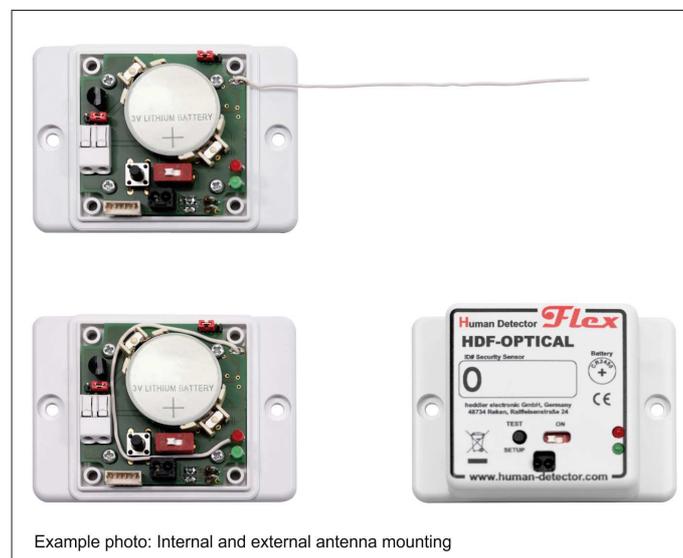


Proceed as follows:

- Open the sensor housing by removing the four locking screws.
- Carefully lift the wire aerial and pull it straight out from its attachment point.
- Look at the top of the plastic housing. There is a small recess. This enables you to guide the antenna to the outside when the housing is closed. Place the wire aerial in such a way that it points outwards at the correct position.

- Close the sensor housing by placing the upper part on top and closing the housing with the four locking screws. Make sure that the wire aerial is routed through the recess.

Note:

Ensure that the wire aerial is correctly aligned after attaching the sensor module to its final mounting location. **Depending on the location of the sensor housing outlet pull the antenna vertically up or down.** This is referred to as vertical alignment of the antenna. This should be the same for all sensor modules and alarm centres. This enables an optimum range for radio transmission.

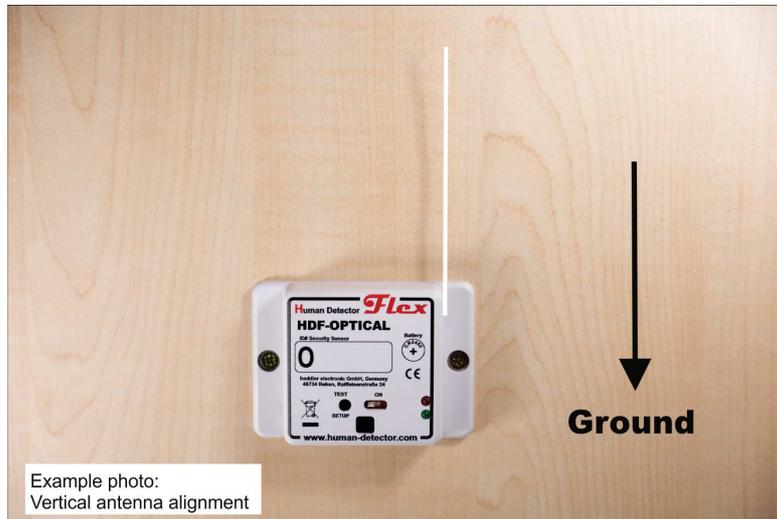


Example photo:
Vertical antenna alignment

Connection to tear-off wires

A maximum of 2 sensor wires can be connected to an **HDF-WIRE** alarm module. The ends of each wire must be connected to the two terminals IN1 or, in the case of a second tear-off wire, to the two terminals IN2. **A connection between IN1 and IN2 must be avoided.**

Important note:

It is recommended to short-circuit non-connected inputs with a 470 Ohm resistor. Due to the high sensitivity of the inputs, false triggering may occur in the event of external interference.

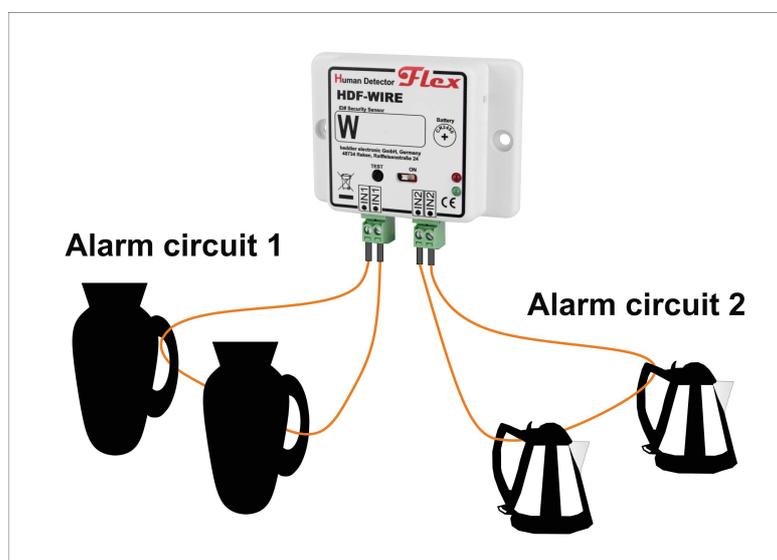

End of installation test

Perform a function test after completing all assembly work. For this purpose switch on the sensor module and trigger an alarm. You can also press the test button, if this is not possible at this time due to the set-up. In both cases, the red TRANSMITTING LED should briefly illuminate. This indicates transmission mode. If the sensor module is already linked to an operating alarm centre, an alarm must be output by the centre (**HDF-BUZZER** or **HDF-SPEECH**).

Check the complete set-up again, if an alarm cannot be triggered or the TRANSMITTING LED does not flash.


Possible causes for faults are:

- The sensor module is not switched on.
- "Battery mode" is selected and the battery is not inserted.
- "Battery operation" is selected and the battery is empty (e.g. old battery).
- "Battery operation" is selected and the micro connector is not positioned on pin2 and pin3 of the "Operating voltage selection" connector panel.
- "External operating voltage" is selected and the power supply unit is not switched on.
- "External operating voltage" is selected and the micro connector is not positioned on pin1 and pin2 of the "Operating voltage selection" connector panel.

In very bright light conditions, you may not notice the red TRANSMITTING LED flashing. In this case, it is advisable to shade the alarm sensor, e.g. by hand, and then repeat the test procedure.

Monitoring of Filling and Water Levels

A special feature of the **HDF-WIRE** alarm sensor is the possibility to monitor filling and water levels. For this purpose, only two measuring sticks or wires have to be connected to one of the two inputs.

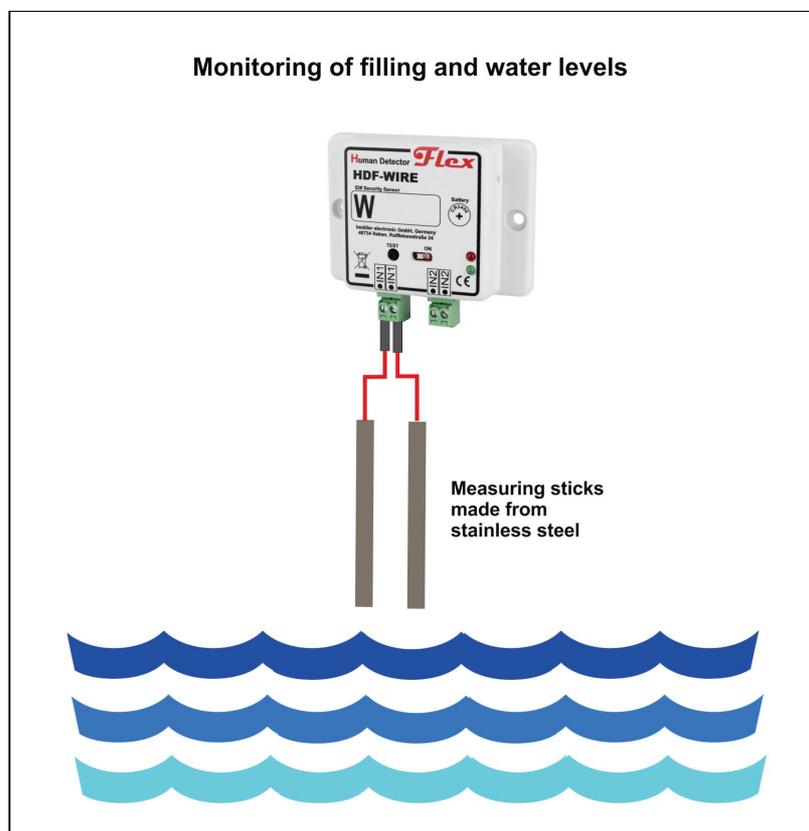

System Login

The **Human Detector** *Flex* security system has three operating modes with different levels of performance.

EASY-Mode	operating modes for simple, small and medium size installations
MULTI-Mode	operating modes supported by powerful software
PROFI-Mode	high-end system with transmission to IP based control center

Switching between the operating modes is possible at any time. All components are upward compatible. This means that you can switch to a higher operating mode at any time and use the previously purchased units without restriction. You can also downsize larger security installations at any time or transfer these into several, independent smaller installations. The **Human Detector** *Flex* Technology offers maximum return on your investment.

Registration of alarm sensors in EASY-Mode

EASY-Mode is the most simple operating mode. Due to its performance, it meets the demands of a wide range of users. Up to 30 alarm sensors incl. hand-held transmitters can be connected in **EASY-Mode** to an **HDF-BUZZER** or **HDF-SPEECH** alarm centre. However, it is also possible to connect one alarm sensor with several alarm centres. This is useful in applications where an alarm is to be output at several locations.

Pairing is done by pressing the pairing and test buttons. When these buttons are pressed, the system operating data and identifiers are automatically shared. No additional configuration is required.

(+) Advantages **EASY-Mode**:


- Pairing in seconds at the touch of a button
- Fast training for inexperienced users

(-) Disadvantages **EASY-Mode**:

- Limited to 30 alarm sensors max. per alarm centre
- Deletion only in complete blocks (no individual deletion)
- All paired sensors offer the same alarm behaviour at the respective alarm centre. This may vary at the individual alarm centres.
- Project documentation must be created manually by the user
- No active monitoring of vital signs (Heartbeat Monitoring, HBM)

To log in in **EASY-Mode**, proceed as follows:

- Open the housing of the **HDF-BUZZER** or **HDF-SPEECH** alarm centre by unscrewing the 4 screws on the back.
- Switch on the alarm centre.
- Switch on the alarm sensor to be registered.
- **Press the pairing button on the alarm centre once.** The RX LED next to the pairing button flashes once to indicate pairing readiness.

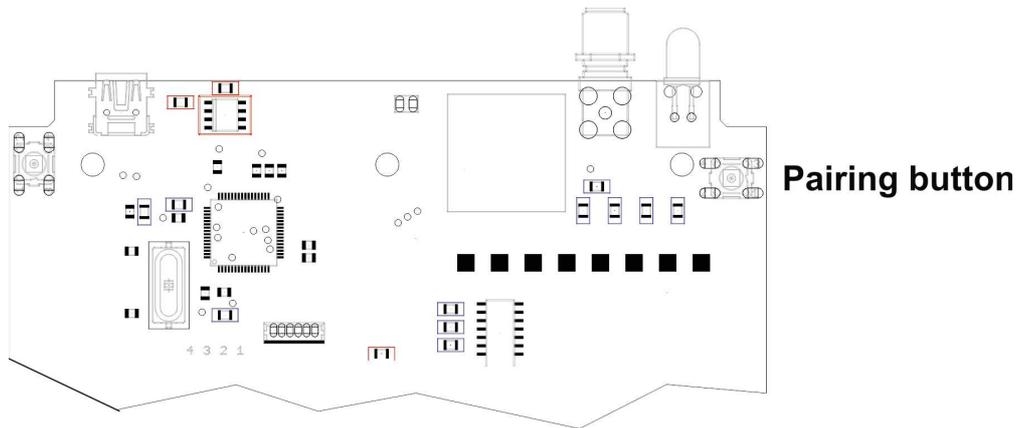

- **Also press the test button on the sensor module once.** Successful pairing is indicated by a double flash of the red RX LED next to the pairing button.
- Press the test button repeatedly. Each time it is pressed again, an alarm is triggered.

You can now register more sensors by repeating the process. Close the housing of the alarm centre after completion of the work.

Important note:

The alarm centre has a maximum of 30 memory locations for identifiers of alarm modules. If all memory locations are already occupied by older installations, you should first reset the alarm centre to its original state. All 30 occupied memory locations are then deleted. Individual memory locations cannot be deleted. All alarm sensors must be re-registered after a reset to the original state.

Attention - this procedure deletes all previous logins to this alarm centre!

To reset the alarm centre to its original state, proceed as follows:

- Open the housing of the **HDF-BUZZER** or **HDF-SPEECH** alarm centre by unscrewing the 4 screws on the back.
- Switch on the alarm centre.
- **Press the pairing button for at least 10 seconds.** The RX LED next to the pairing button illuminates continuously during the delete process. The RX LED flashes three times when the delete process is finished. You can now stop pressing the pairing button. All connections to the previously paired sensors are now deleted. The alarm centre is reset to its original state.

Note:

Please do not forget to provide documentation of the work you carried out. This is necessary in order to completely understand the functionality of the security system.

Registration of alarm sensors in MULTI- and PROFI-Mode

Registration in **MULTI-** or **PROFI-Mode** is only possible with the **HDF-CONFIGURATOR** software, which is available free of charge. The operating modes provide for maximum flexibility and performance. Up to 200 alarm sensors can be connected to one alarm centre.

The entire security network is designed on the PC with the **HDF-CONFIGURATOR** Windows software. Once the design is complete, the module identifiers are transmitted to the software. The control files for the alarm

centres (**HDF-BUZZER** and **HDF-SPEECH**) and the **HDF-AMD** alarm management unit are generated from this. These are then transferred to the relevant units (**HDF-BUZZER**, **HDF-SPEECH** or **HDF-AMD**) via USB interface or WLAN.

(+) Advantages MULTI or PROFI mode:

- Support of up to 200 alarm sensors per alarm centre
- Easy configuration with the **HDF-CONFIGURATOR** Windows software
- Variable setting of alarm behaviour and networking
- Automatic generation of complete project documentation
- Forwarding of alarm messages to IP based control center

(-) Disadvantages MULT-I or PROFI-Mode:

- Familiarisation with **HDF-CONFIGURATOR** software required
- More complex installation of the **HDF-AMD** alarm management system

The exact procedure for registering sensors in **MULTI-** and **PROFI-Mode** is described in the chapter "**Human Detector *Flex* Software**".

Maintenance and Care

The **Human Detector Flex** alarm sensors require no special maintenance and care. However, as these are safety-relevant systems, regular checks are recommended. The following should be noted here.

Regular testing of the alarm sensors

The functionality of the respective sensor module should be checked at regular intervals. An alarm must be triggered on the sensor module for this purpose. The test frequency must be in accordance with the security plan of your institution. **At least one test should be carried out per year. Record the test and archive the documentation.**

Depending on your operating modes (**EASY-**, **MULTI-** or **PROFI-Mode**), check the below functions:

1. **EASY-** and **MULTI-Mode** installations

- Trigger an alarm.
- Check that the alarm reaches the designated alarm centres.
- Check that no message "Battery end of life imminent" is output together with the alarm. (double tone to **HDF-SPEECH** or **HDF-BUZZER**)
- Check that the alarm sensor is properly mounted.
- Check that the alarm sensor shows no sign of external damage.
- If the antenna has been placed out of the plastic housing (see: Mounting Location and Installation), its correct alignment must be checked.
- Check that no shielding objects have been retrofitted near the alarm sensors.
- If additional external cables are connected to the sensor (**HDF-EXTERN**, **HDF-WIRE** and **HDF-TOUCH**), check for correct connection and cable routing.
- With the sensor for gallery rails **HDF-HANG**, also check for correct connection to the retaining rope.

2. **Additional tests in PROFi mode**

- Check whether the alarm reaches the control center.
- Check that no message "Battery end of life imminent" has been sent.
- Note the reception field strength of the alarm module and compare it with older recorded data.

It is important that the inspection work is carried out diligently by instructed personnel. We can carry out this work on request.

Please contact our sales department should you be interested in this service.

Unless the alarm modules are powered with an external power supply unit, batteries may have to be replaced when necessary. **The calculated lifetime of the batteries listed in the data sheets is only for reference.** It can be influenced positively or negatively by factors such as temperature, alarm frequency, battery age and original battery capacity.

Changing the batteries of the alarm modules

- Switch off the alarm module.
- Dismantle the alarm sensor for access to the screw fitting on the back.
- Loosen the four outer screws and remove the cover from the sensor housing.
- Remove the battery from the housing. Carefully push it out of the holder by pressing on the edge of the battery.
- Insert the new **CR2450** battery into the holder. The positive pole should point upwards. Apply slight pressure for the battery to lock into the holder. Ensure that the battery is properly latched.

Note!

Only use branded batteries of the **CR2450** type. Inexpensive batteries from unknown manufacturers often have a significantly lower capacity and a higher self-discharge. **Defective batteries can leak. The batteries contain mercury and there is the risk of poisoning if touched.**

- Close the sensor housing by inserting and tightening the four housing cover screws. Proceed carefully and do not overtighten the screws.
- Install the sensor system again in its old position.
- Check - if connected - all additional external cables (**HDF-WIRE**, **HDF-EXTERN** and **HDF-TOUCH**). Check - if necessary - the connection to the retaining rope at the **HDF-HANG**.
- Switch on the sensor module. During switch-on an alarm is generated automatically. You can also press the test button on the sensor. This also triggers an alarm.
- Provided that the generated alarm messages have reached their destination, you should now test the entire installation again and trigger an alarm. Check whether the alarm reaches its destination (**HDF-BUZZER**, **HDF-SPEECH** or **IP based alarm center**).
- Document the battery change.

Note!

Be careful not to damage the electronics on the circuit board when changing the battery.

Cleaning the sensor housings

Normally, it is not necessary to clean the housing. Should it become necessary, we recommend the use of a mild glass cleaner.

Please proceed as follows:

- Take a sufficiently large piece of kitchen paper and spray the glass cleaner onto the paper once or max. twice.
- Spread the cleaning liquid on the kitchen paper and carefully wipe the surface of the sensor housing with the paper.
- Then check the function of the alarm module by triggering a test alarm.

Note!

Do not use solvents to clean the sensor housing. Do not spray the housing directly. Moisture must not penetrate the sensor housing. In case of moisture penetration, dry the housing and check its correct function.

In case of dirt or moisture in the sensor housing and its function is permanently compromised, please contact our technical customer service immediately.

Terms of Warranty

The warranty period is 2 years from the date of purchase shown on the invoice. Different warranty conditions for commercial customers result from the General Terms and Conditions of **heddi er electronic GmbH**. In the event of a warranty claim, the user is entitled to send the unit to their authorised dealer for repair. For each repair within the warranty period, a proof of purchase needs to be presented to the authorised dealer. The services included in the warranty cover all spare parts and labour costs necessary for repair.

Improper use or faulty installations are not covered by the terms of this warranty. In addition, technical modifications to the unit by unauthorised persons will render any claim invalid. The manufacturer is not liable for damage caused during transport to the service workshop.

The statutory warranty rules are not affected by the guarantee scheme. No guarantee or warranty claim exists for units where the serial number labels have been removed or the prescribed conditions of use and operation have been violated.

Procedure in Case of Warranty Repair

Defective **Human Detector Flex** components should be delivered to the authorised dealer in the original box or equivalent packaging. Attach a copy of the purchase invoice. No responsibility can be assumed for safe delivery by the carrier. It is therefore recommended to take insurance against loss, theft and damage during transit.

The **Human Detector Flex** components supplied cannot be returned after the original cardboard box has been opened or the seal has been damaged. Devices without a serial number decal are excluded from the warranty and guarantee agreement.

Miscellaneous

Changes to technical specifications and errors are possible. The manufacturer reserves the right to change the technical specifications of individual devices and components at any time and without providing reasons. The copyright of this document is owned by **heddi er electronic GmbH**. The production of copies for work support or maintenance of the **Human Detector Flex** security systems is permitted at any time. The production of copies for distribution to third parties, even in excerpts - by whatever means - is only permitted after written approval.

Windows is a registered trademark of Microsoft Inc, USA.
Human Detector is a registered trademark of heddi er electronic GmbH.

Help & Support

Despite its simple operation, many users find modern security technology quite complex and can grasp the concept to some extent only. The diversity of museums and collections requires an expert and the task-related installation of the **Human Detector Flex** technology. The aim is to create a security system that is optimized to customer needs. If you are in charge of the installation, we would like to make the following suggestions:

Suggestion Thoroughly read the operating instructions to understand the various functions and special features of the individual components. Compare the delivered systems with the documentation.

Suggestion It often is beneficial to try out an installation outside the exhibition first. Build small functional units and put them into operation. Change the settings of the various components and observe the outcome.

Suggestion Plan your security system in advance. Create a diagram of which sensors collaborate with which alarm devices. Use your diagram as a guide during the installation. If you make changes to your concept - which is very likely - enter them immediately in your diagram. **Remember, accurate project documentation is a prerequisite for all future work on your security system.**

Questions Please direct any questions to your retailer first. They should be trained and be able to answer your questions. If not, they will receive the necessary support from us.

Training Take advantage of our training opportunities. We will train you and your colleagues in the installation and use of the **Human Detector Flex** security technology. The training courses can take place at your premises or at our training centre in Coesfeld (near Münster in North Rhine-Westphalia, Germany). Training can be combined with the initial installation of your security system, if required. Our sales department will be happy to inform you about costs, conditions and dates for technical training.

Support Do you need help quickly? Our technical support can be reached by phone **Monday to Thursday between 8.00 and 17.00 or on Friday until 15.00**. Training and technical support can be provided by email, phone or video conference (Microsoft Teams).

Technical Support: **heddier electronic GmbH**
 support@heddier.com
 Phone: +49 2864 95 178-0

Important! **Check the functions of all installed components at regular intervals.** This is important in order to detect deviations from normal operation and possible errors at an early stage. Prepare and archive a test protocol. The tests can range from triggering a test alarm to checking the radio links and battery voltages. We will tell you about the exact procedure in our training courses.

heddier electronic GmbH reserves the right to make different service agreements with museums, collections, private collectors and other institutions. These agreements may include special services, response and repair times. All such agreements shall be in writing and signed. Verbal agreements outside the scope of the normal use of our systems and support are only valid after written confirmation.